

XR3-30400-RF

RGB Controller

Product Features


- 3 channel RGB Control. Constant voltage driver, Max 4A each channel.
- 31 control mode functions and 256 grey level changing.
- 8 brightness level & speed adjustments.



Product Specifications

- Input Power DC 12 -24V
- Output Power 12V: 144W 24V: 288W
- Standby Power 0.5W
- Size (L)86 x (W)66 x (H)26 (mm); (L)3.39 x (W)2.60 x (H)1.02 (inch)
- Weight 145g

Dimensions

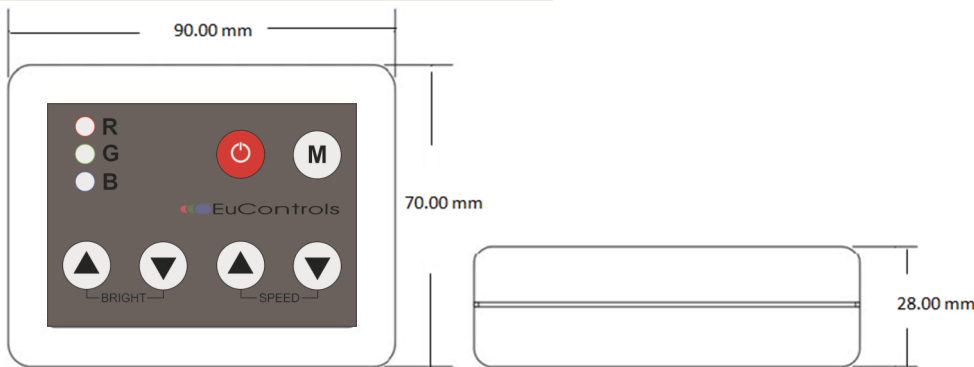

Connection Instructions



XR3-30400-RF

RGB Controller

31 Mode Settings

MODE SELECTION			
1. Red	9. Flashing 2	17. White flashing	25. White flickering
2. Green	10. 6 colors flashing	18. Gradual flashing	26. RG flickering
3. Blue	11. 6 colors flashing 2	19. RGB gradual flashing	27. RB flickering
4. Yellow	12. RGB flashing	20. RG gradual flashing	28. GB flickering
5. Purple	13. RGB flashing 2	21. RB gradual flashing	29. R flickering
6. Cyan	14. RG flashing	22. GB gradual flashing	30. G flickering
7. White	15. RB flashing	23. Flickering	31. B flickering
8. 7 colors flashing	16. GB flashing	24. RGB Flickering	

Operation Instruction

Touch Pad Panel functions:

M: Mode selection

Brightness: ▲ increase brightness

▼ decrease brightness

Speed: ▲ increase brightness

▼ decrease brightness

